


Welded, Corrosion Tube TIG / LS

EN 10217-7, ASTM-A 778, ASTM-A 312
EN 10204 3.1

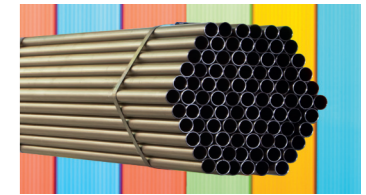


Ø mm	Wall mm	Ø1 mm	INCH-GAS-SCH Dimension	Kg / m	304/L 4301 4307	316L 4404
6.00	1.00	4.00		0.125	● ○	●
8.00	1.00	6.00		0.175	● ○	● ○
8.00	1.50	5.00		0.244		●
10.00	1.00	8.00		0.225	● ○	●
10.00	1.50	7.00		0.319	● ○	●
12.00	1.00	10.00		0.275	● ○	●
12.00	1.50	9.00		0.394	● ○	● ○
12.00	2.00	8.00		0.501	●	
13.00	1.50	10.00		0.432	●	
13.72	1.65	10.42	1/4" SCH 10S	0.499	●	●
13.72	2.24	9.24	1/4" SCH 40S	0.644	●	●
14.00	1.00	12.00		0.326	●	●
14.00	1.50	11.00		0.470	● ○	
14.00	2.00	10.00		0.601	●	●
15.00	1.00	13.00		0.351	● ○	
15.00	1.50	12.00		0.507	● ○	● ○
15.00	2.00	11.00		0.651	● ○ ○	
16.00	1.00	14.00		0.376	● ○	●
16.00	1.50	13.00		0.545	● ○	● ○
16.00	2.00	12.00		0.701	● ○	● ○
17.15	1.65	13.85	3/8" SCH 10S	0.640	●	●
17.15	2.31	12.53	3/8" SCH 40S	0.858	●	●
17.20	2.00	13.20		0.761	● ○	
17.20	2.30	12.60	3/8" GAS / BSP	0.858		● ○
18.00	1.00	16.00		0.426	● ○	● ○
18.00	1.50	15.00		0.620	● ○	● ○
18.00	2.00	14.00		0.801	●	●
19.00	1.20	16.60		0.550	● ○	
20.00	1.00	18.00		0.476	● ○	●
20.00	1.50	17.00		0.695	● ○	● ○
20.00	2.00	16.00		0.901	● ○	● ○
21.30	1.60	18.10		0.789		● ○
21.30	2.00	17.30		0.967	● ○	● ○
21.30	2.65	16.00	1/2" GAS / BSP	1.238	● ○	● ○
21.34	1.65	18.04	1/2" SCH 5S	0.814	●	
21.34	2.11	17.12	1/2" SCH 10S	1.016	●	● ○
21.34	2.77	15.80	1/2" SCH 40S	1.288	● ○	● ○
22.00	1.00	20.00		0.526	● ○	
22.00	1.20	19.60		0.625	● ○	
22.00	1.50	19.00		0.770	● ○ ○	● ○
22.00	2.00	18.00		1.002	● ○	●
25.00	1.20	22.60		0.740		● ○
25.00	1.50	22.00		0.883	● ○ ○	● ○
25.00	2.00	21.00		1.152	● ○	● ○
25.00	2.50	20.00		1.409	● ○	
25.40	1.25	22.90		0.756	●	
26.67	1.65	23.37	3/4" SCH 5S	1.034	●	

● = Stock, annealed


○ = Stock, not annealed

⊙ = Stock, polished G 220 / 240




Welded, Corrosion Tube TIG / LS

EN 10217-7, ASTM-A 778, ASTM-A 312
EN 10204 3.1




Ø mm	Wall mm	Ø1 mm	INCH-GAS-SCH Dimension	Kg / m	304/L 4301 4307	316L 4404
26.67	2.11	22.45	3/4" SCH 10S	1.298	●	● ○
26.67	2.87	20.93	3/4" SCH 40S	1.710	●	● ○
26.90	1.60	23.70		1.014	○	○
26.90	2.00	22.90		1.247	● ○	○
26.90	2.65	21.60	3/4" GAS / BSP	1.609	● ○ ○	● ○
28.00	1.00	26.00		0.676	○	
28.00	1.20	25.60		0.805	●	●
28.00	1.50	25.00		0.995	● ○	● ○
28.00	2.00	24.00		1.302	● ○	●
29.00	1.50	26.00		1.040	○	
30.00	1.50	27.00		1.070	● ○	○
30.00	2.00	26.00		1.402	● ○	○
32.00	1.50	29.00		1.146	●	○
32.00	2.00	28.00		1.502	●	○
33.40	1.65	30.10	1" SCH 5S	1.312	●	●
33.40	2.77	27.86	1" SCH 10S	2.125	●	○
33.40	3.38	26.64	1" SCH 40S	2.541	●	○
33.70	1.60	30.50		1.286	○	○
33.70	2.00	29.70		1.588	● ○	● ○ ○
33.70	2.60	28.50		2.025	○	
33.70	3.00	27.70		2.306	● ○	●
33.70	3.25	27.20	1" GAS / BSP	2.478	● ○	● ○
35.00	1.50	32.00		1.258	●	
35.00	2.00	31.00		1.653	●	
38.00	1.50	35.00		1.371	● ○	● ○
38.00	2.00	34.00		1.803	● ○ ○	● ○
38.00	2.50	33.00		2.222	○	
40.00	1.00	38.00		0.977	○	
40.00	1.50	37.00		1.446		● ○
40.00	2.00	36.00		1.903	○	● ○
41.00	1.50	38.00		1.490	○	
42.16	1.65	38.86	1.1/4" SCH 5S	1.674	●	
42.16	2.77	36.62	1.1/4" SCH 10S	2.732	●	○
42.16	3.56	35.04	1.1/4" SCH 40S	3.441	●	○
42.40	1.60	39.20		1.635	○	
42.40	2.00	38.40		2.023	● ○	● ○ ○
42.40	2.60	37.20		2.591	○	○ ○
42.40	3.00	36.40		2.960	●	
42.40	3.25	35.90		3.186	● ○ ○	● ○
44.50	1.50	41.50		1.620	○	
44.50	2.00	40.50		2.128	● ○	● ○
48.26	1.65	44.96	1.1/2" SCH 5S	1.926	●	●
48.26	2.77	42.72	1.1/2" SCH 10S	3.155	●	○
48.26	3.68	40.90	1.1/2" SCH 40S	4.108	●	○
48.30	1.60	45.10		1.871		○
48.30	2.00	44.30		2.319	● ○	● ○ ○
48.30	2.60	43.10		2.975	○ ○	○ ○
48.30	3.00	42.30		3.403	●	●

● = Stock, not annealed ○ = Stock, not annealed ○ = Stock, polished G 220 / 240




Welded, Corrosion Tube TIG / LS

EN 10217-7, ASTM-A 778, ASTM-A 312
EN 10204 3.1




Ø mm	Wall mm	Ø1 mm	INCH-GAS-SCH Dimension	Kg / m	304/L 4301 4307	316L 4404
48.30	3.25	41.80	1.1/2" GAS / BSP	3.666	● ○	● ○
50.00	1.00	49.00		1.230	●	
50.00	1.50	47.00		1.822	● ○ ○	○
50.00	2.00	46.00		2.404	● ○	
50.80	1.50	47.80		1.852	○	
50.80	2.00	46.80		2.444	● ○	○
50.80	2.60	45.60		3.138	●	●
51.00	1.50	48.00		1.860	●	
53.00	1.50	50.00		1.934	○	
54.00	1.50	51.00		1.972	○	
54.00	2.00	50.00		2.604	○	○
57.00	1.50	54.00				
57.00	2.00	53.00		2.754	●	●
57.00	3.00	51.00		4.056	●	●
60.30	1.60	57.10		2.352	○	○
60.30	2.00	56.30		2.920	● ○	● ○
60.30	2.60	55.10		3.757	○	○
60.30	3.00	54.30		4.304	●	● ○
60.30	3.65	53.00	2" GAS / BSP	5.178	● ○	● ○
60.33	1.65	57.03	2" SCH 5S	2.424	●	●
60.33	2.77	54.79	2" SCH 10S	3.992	●	○
60.33	3.91	52.51	2" SCH 40S	5.524	●	○
63.50	2.00	59.50		3.080	● ○	●
63.50	2.60	58.30		3.965	●	●
70.00	1.50	67.00		2.573	○	
70.00	2.00	66.00		3.405	○	○
70.00	3.00	64.00		5.033	○	
73.03	2.11	68.81	2.1/2" CH 5S	3.747	●	●
73.03	3.05	66.93	2.1/2" CH 10S	5.345	●	●
73.03	5.16	62.71	2.1/2" CH 40S	8.769	●	●
76.10	1.60	72.90		2.985	○	
76.10	2.00	72.10		3.711	● ○	● ○
76.10	2.60	70.90		4.785	●	●
76.10	3.00	70.10		5.491	● ○	● ○
76.10	3.60	68.90	2.1/2" GAS / BSP	6.535	● ○	● ○
80.00	2.00	76.00		3.906	○	
83.00	1.50	80.00		3.061	○	
84.00	2.00	80.00		4.107	○	○
85.00	2.00	81.00		4.157	○	○
88.90	1.60	85.70		3.498		○
88.90	2.00	84.90		4.352	○	○
88.90	2.11	84.68	3" SCH 5S	4.585	●	● ○
88.90	2.60	83.70		5.618	●	○
88.90	3.00	82.90		6.453	○	○
88.90	3.05	82.80	3" SCH 10S	6.557	●	○
88.90	3.60	81.70		7.689	●	●
88.90	4.05	80.80	3" GAS / BSP	8.605	● ○	● ○
88.90	5.49	77.92	3" SCH 40S	11.466	●	●

● = Stock, annealed ○ = Stock, not annealed ○ = Stock, polished G 220 / 240




Welded, Corrosion Tube TIG / LS

EN 10217-7, ASTM-A 778, ASTM-A 312
EN 10204 3.1




Ø mm	Wall mm	Ø1 mm	INCH-GAS-SCH Dimension	Kg / m	304/L 4301 4307	316L 4404
101.60	3.00	95.60		7.407		⊙
101.60	3.05	95.50	3.1/2" SCH 10S	7.526	●	●
101.60	4.00	93.60		9.776	●	⊙
101.60	5.74	90.12	3.1/2" SCH 40S	13.778	●	●
103.00	1.50	100.00		3.812		⊙
104.00	2.00	100.00		5.108		⊙
106.00	3.00	100.00		7.737		⊙
108.00	2.00	104.00		5.308		⊙
108.00	3.00	102.00		7.888		⊙
108.00	4.00	100.00		10.417		⊙
114.30	2.00	110.30		5.624		⊙
114.30	2.11	110.08	4" SCH 5S	5.927	●	●
114.30	2.60	109.10		7.272	●	⊙
114.30	3.00	108.30		8.361		⊙
114.30	3.05	108.20	4" SCH 10S	8.496	●	●
114.30	3.60	107.10		9.979	●	●
114.30	4.00	106.30		11.048	●	⊙
114.30	6.02	102.26	4" SCH 40S	16.322	●	●
129.00	2.00	125.00		6.360		⊙
133.00	4.00	125.00		12.921		⊙
139.70	2.00	135.70		6.896		⊙
139.70	2.60	134.50		8.926		⊙
139.70	3.00	133.70		10.269		⊙
139.70	4.00	131.70		13.592		⊙
141.30	3.40	134.50	5" SCH 10S	11.740	●	●
141.30	6.55	128.20	5" SCH 40S	22.101	●	●
153.00	1.50	150.00		5.690		⊙
154.00	2.00	150.00		7.612		⊙
156.00	3.00	150.00		11.493		⊙
159.00	3.00	153.00		11.719		⊙
159.00	4.00	151.00		15.525		⊙
168.28	2.77	162.74	6" SCH 5S	11.480	●	●
168.28	3.40	161.48	6" SCH 10S	14.037	●	●
168.28	7.11	154.08	6" SCH 40S	28.694	●	●
168.30	2.00	164.30		8.328		⊙
168.30	2.60	163.10		10.788		⊙
168.30	3.00	162.30		12.417		⊙
168.30	4.00	160.30		16.456		⊙
204.00	2.00	200.00		10.116		⊙
206.00	3.00	200.00		15.249		⊙
219.08	2.77	213.54	8" SCH 5S	15.003	●	●
219.08	3.76	211.56	8" SCH 10S	20.272	●	●
219.08	6.35	206.38	8" SCH 20	33.825	●	●
219.08	8.18	202.72	8" SCH 40S	43.198	●	●
219.10	2.00	215.10		10.872		⊙
219.10	2.60	213.90		14.095		⊙

● = Stock, annealed ⊙ = Stock, not annealed ⊙ = Stock, polished G 220 / 240



Welded, Corrosion Tube TIG / LS

EN 10217-7, ASTM-A 778, ASTM-A 312
EN 10204 3.1



Ø mm	Wall mm	Ø1 mm	INCH-GAS-SCH Dimension	Kg / m	304/L 4301 4307	316L 4404
219.10	2.00	215.10		10.872		⊙
219.10	2.60	213.90		14.095		⊙
219.10	3.00	213.10		16.233		⊙
219.10	4.00	211.10		21.544		⊙
254.00	2.00	250.00		12.620		⊙
256.00	3.00	250.00		19.005		⊙
273.00	2.00	269.00		13.572		⊙
273.00	3.00	267.00		20.282		⊙
273.00	4.00	265.00		26.943		⊙
273.05	3.40	266.25	10" SCH 5S	22.957	●	●
273.05	4.19	264.67	10" SCH 10S	28.208	●	●
273.05	6.35	260.35	10" SCH 20	42.406	●	●
273.05	9.27	254.51	10" SCH 40S	61.229	●	●
304.00	2.00	300.00		15.124		⊙
306.00	3.00	300.00		22.761		⊙
323.85	3.96	315.93	12" SCH 5S	31.720		●
323.85	4.57	314.71	12" SCH 10S	36.536	●	●
323.85	6.35	311.15		50.480	●	●
323.85	9.53	304.79		75.007	●	●
323.90	2.00	319.90		16.120		⊙
323.90	3.00	317.90		24.106		⊙
323.90	4.00	315.90		32.041		⊙
355.60	3.00	349.60		26.487		⊙
355.60	3.96	347.68	14" SCH 5S	34.868		⊙
355.60	4.78	346.04	14" SCH 10S	41.990	●	●
355.60	9.53	336.54	14" SCH 40	82.580		●
406.40	3.00	400.40		30.303		⊙
406.40	4.19	398.02	16" SCH 5S	42.199		⊙
406.40	4.78	396.84	16" SCH 10S	48.070	●	●
406.40	9.53	387.34	16" SCH 40S	94.706	●	●
457.20	3.00	451.20		34.120		⊙
508.00	3.00	502.00		37.936		⊙
508.00	4.00	500.00		50.481		⊙
609.60	3.00	603.60		45.568		⊙

● = Stock, annealed ⊙ = Stock, not annealed ⊙ = Stock, polished G 220 / 240