

## Lige union


### Straight union

DIN 2353 / DIN EN ISO 8434-1

EN 10204 3.1



| AD | Udførelse Code | Bar | L1 | L2 | SW1  | SW2 | Art.no | Kg / pc | 316Ti |
|----|----------------|-----|----|----|------|-----|--------|---------|-------|
| 6  | Let            | 315 | 44 | 10 | 14,0 | 12  | HS10   | 0,06    | ●     |
| 8  | Let            | 315 | 45 | 11 | 17,0 | 14  | HS10   | 0,08    | ●     |
| 10 | Let            | 315 | 48 | 13 | 19,0 | 17  | HS10   | 0,11    | ●     |
| 12 | Let            | 315 | 49 | 14 | 22,0 | 19  | HS10   | 0,14    | ●     |
| 14 | Svær           | 630 | 63 | 22 | 27,0 | 24  | HS15   | 0,30    | ●     |
| 15 | Let            | 315 | 24 | 16 | 27,0 | 24  | HS10   | 0,23    | ●     |
| 16 | Svær           | 400 | 65 | 21 | 30,0 | 27  | HS15   | 0,35    | ●     |
| 18 | Let            | 315 | 56 | 16 | 32,0 | 27  | HS10   | 0,35    | ●     |
| 20 | Svær           | 400 | 73 | 23 | 36,0 | 32  | HS15   | 0,58    | ●     |
| 22 | Let            | 160 | 63 | 20 | 36,0 | 32  | HS10   | 0,44    | ●     |
| 25 | Svær           | 400 | 84 | 26 | 46,0 | 41  | HS15   | 0,95    | ●     |
| 28 | Let            | 160 | 65 | 21 | 41,0 | 41  | HS10   | 0,55    | ●     |
| 30 | Svær           | 400 | 88 | 27 | 50,0 | 46  | HS15   | 1,12    | ●     |
| 35 | Let            | 160 | 74 | 20 | 50,0 | 46  | HS10   | 0,87    | ○     |
| 38 | Svær           | 315 | 99 | 29 | 60,0 | 55  | HS15   | 1,69    | ○     |
| 42 | Let            | 160 | 75 | 21 | 60,0 | 55  | HS10   | 1,28    | ○     |



## Vinkel union

### Union elbow

DIN 2353 / DIN EN ISO 8434-1


EN 10204 3.1



| AD | Udførelse Code | Bar | L1 | L2   | SW1 | SW2 | Art.no | Kg / pc | 316Ti |
|----|----------------|-----|----|------|-----|-----|--------|---------|-------|
| 6  | Let            | 315 | 27 | 12,0 | 14  | 12  | HE10   | 0,04    | ●     |
| 8  | Let            | 315 | 29 | 14,0 | 17  | 12  | HE10   | 0,06    | ●     |
| 10 | Let            | 315 | 30 | 15,0 | 19  | 14  | HE10   | 0,07    | ●     |
| 12 | Let            | 315 | 32 | 17,0 | 22  | 17  | HE10   | 0,10    | ●     |
| 14 | Svær           | 630 | 40 | 22,0 | 27  | 19  | HE15   | 0,21    | ●     |
| 15 | Let            | 315 | 36 | 21,0 | 27  | 19  | HE10   | 0,17    | ●     |
| 16 | Svær           | 400 | 43 | 24,5 | 30  | 24  | HE15   | 0,26    | ●     |
| 18 | Let            | 315 | 40 | 23,5 | 32  | 24  | HE10   | 0,25    | ●     |
| 20 | Svær           | 400 | 48 | 26,5 | 36  | 27  | HE15   | 0,41    | ●     |
| 22 | Let            | 160 | 44 | 27,5 | 36  | 27  | HE10   | 0,32    | ●     |
| 25 | Svær           | 400 | 54 | 30,0 | 46  | 36  | HE15   | 0,45    | ●     |
| 28 | Let            | 160 | 47 | 30,5 | 41  | 36  | HE10   | 1,00    | ●     |
| 30 | Svær           | 400 | 62 | 35,5 | 50  | 41  | HE15   | 0,68    | ●     |
| 35 | Let            | 160 | 56 | 34,5 | 50  | 41  | HE10   | 1,54    | ○     |
| 38 | Svær           | 315 | 72 | 41,0 | 60  | 50  | HE15   | 1,07    | ○     |
| 42 | Let            | 160 | 63 | 40,0 | 60  | 50  | HE10   | 1,28    | ○     |

● = lager  
○ = ab fabrik

● = stock  
○ = ex works

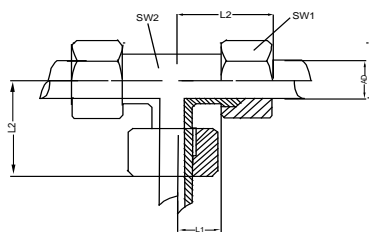

## T union


### Union tee

DIN 2353 / DIN EN ISO 8434-1

EN 10204 3.1



| AD | Udførelse Code | Bar | L1   | L2 | SW1 | SW2  | Art.no | Kg / pc | 316Ti |
|----|----------------|-----|------|----|-----|------|--------|---------|-------|
| 6  | Let            | 315 | 12,0 | 27 | 14  | 12,0 | HT10   | 0,002   | ●     |
| 8  | Let            | 315 | 14,0 | 29 | 17  | 12,0 | HT10   | 0,002   | ●     |
| 10 | Let            | 315 | 15,0 | 60 | 19  | 14,0 | HT10   | 0,003   | ●     |
| 12 | Let            | 315 | 17,0 | 32 | 22  | 17,0 | HT10   | 0,003   | ●     |
| 14 | Svær           | 630 | 22,0 | 40 | 27  | 17,0 | HT15   | 0,004   | ●     |
| 15 | Let            | 315 | 21,0 | 36 | 27  | 19,0 | HT10   | 0,004   | ●     |
| 16 | Svær           | 400 | 24,4 | 43 | 30  | 24,0 | HT15   | 0,004   | ●     |
| 18 | Let            | 315 | 23,5 | 40 | 32  | 24,0 | HT10   | 0,005   | ●     |
| 20 | Svær           | 400 | 26,5 | 48 | 36  | 27,0 | HT15   | 0,009   | ●     |
| 22 | Let            | 160 | 27,5 | 44 | 36  | 27,0 | HT10   | 0,006   | ●     |
| 25 | Svær           | 400 | 3,0  | 54 | 46  | 36,0 | HT15   | 0,011   | ●     |
| 28 | Let            | 160 | 30,5 | 47 | 41  | 36,0 | HT10   | 0,008   | ●     |
| 30 | Svær           | 400 | 35,5 | 62 | 50  | 41,0 | HT15   | 0,015   | ●     |
| 35 | Let            | 160 | 34,5 | 56 | 50  | 41,0 | HT10   | 0,017   | ○     |
| 38 | Svær           | 315 | 41,0 | 72 | 60  | 50,0 | HT15   | 0,019   | ○     |
| 42 | Let            | 160 | 40,0 | 63 | 60  | 50,0 | HT10   | 0,021   | ○     |



## Nippel Vinkel

### Male elbow

DIN 2353 / DIN EN ISO 8434-1


EN 10204 3.1



| AD | R    | Udførelse BAR Code | S1 | S2   | SW1 | SW2  | Art.no | Kg / pc | 316Ti |
|----|------|--------------------|----|------|-----|------|--------|---------|-------|
| 6  | 1/8" | Let 315            | 27 | 20,0 | 14  | 12,0 | HW30   | 0,03    | ●     |
| 6  | 1/4" | Let 315            | 27 | 12,0 | 14  | 12,0 | HW30   | 0,06    | ●     |
| 8  | 1/8" | Let 315            | 29 | 14,0 | 17  | 8,0  | HW30   | 0,05    | ●     |
| 8  | 1/4" | Let 315            | 29 | 14,0 | 17  | 12,0 | HW30   | 0,06    | ●     |
| 8  | 3/8" | Let 315            | 32 | 17,0 | 17  | 12,0 | HW30   | 0,08    | ●     |
| 8  | 1/2" | Let 315            | 35 | 19,5 | 17  | 14,0 | HW30   | 0,10    | ●     |
| 10 | 1/4" | Let 315            | 30 | 15,0 | 19  | 12,0 | HW30   | 0,06    | ●     |
| 10 | 3/8" | Let 315            | 30 | 15,0 | 19  | 12,0 | HW30   | 0,06    | ●     |
| 10 | 1/2" | Let 315            | 37 | 21,0 | 19  | 14,0 | HW30   | 0,09    | ●     |
| 12 | 1/4" | Let 315            | 32 | 17,5 | 22  | 17,0 | HW30   | 0,07    | ●     |
| 12 | 3/8" | Let 315            | 32 | 17,5 | 22  | 17,0 | HW30   | 0,08    | ●     |
| 12 | 1/2" | Let 315            | 32 | 17,5 | 22  | 17,0 | HW30   | 0,11    | ●     |
| 14 | 3/8" | Svær 400           | 40 | 22,0 | 27  | 19,0 | HW35   | 0,15    | ●     |
| 14 | 1/2" | Svær 400           | 40 | 22,0 | 27  | 19,0 | HW35   | 0,16    | ●     |
| 15 | 3/8" | Let 315            | 36 | 21,0 | 27  | 19,0 | HW30   | 0,12    | ●     |
| 15 | 1/2" | Let 315            | 36 | 21,0 | 27  | 19,0 | HW30   | 0,13    | ●     |
| 16 | 1/2" | Svær 400           | 43 | 24,5 | 30  | 24,0 | HW35   | 0,20    | ●     |
| 18 | 1/2" | Let 315            | 40 | 23,5 | 32  | 24,0 | HW30   | 0,19    | ●     |

● = lager  
○ = ab fabrik

● = stock  
○ = ex works



## Muffe Adapter


Female connector

DIN 2353 / DIN EN ISO 8434-1

EN 10204 3.1



| AD | G      | Udførelse Code | Bar | S1   | S2   | SW1 | SW2 | Art.no | Kg / pc | 316Ti |
|----|--------|----------------|-----|------|------|-----|-----|--------|---------|-------|
| 6  | 1/8"   | Let            | 315 | 36,0 | 19,0 | 14  | 14  | HF20   | 0,03    | ●     |
| 6  | 1/4"   | Let            | 315 | 41,0 | 24,0 | 19  | 19  | HF20   | 0,04    | ●     |
| 8  | 1/4"   | Let            | 315 | 36,0 | 24,0 | 17  | 19  | HF20   | 0,05    | ●     |
| 10 | 1/4"   | Let            | 315 | 42,0 | 25,0 | 19  | 19  | HF20   | 0,06    | ●     |
| 12 | 3/8"   | Let            | 315 | 43,0 | 26,0 | 22  | 24  | HF20   | 0,09    | ●     |
| 12 | 1/2"   | Let            | 315 | 48,0 | 30,0 | 22  | 27  | HF20   | 0,10    | ●     |
| 14 | 1/2"   | Svær           | 400 | 52,0 | 32,0 | 27  | 27  | HF25   | 0,15    | ●     |
| 15 | 3/8"   | Let            | 315 | 46,0 | 27,0 | 27  | 24  | HF20   | 0,10    | ●     |
| 15 | 1/2"   | Let            | 315 | 49,0 | 31,0 | 27  | 27  | HF20   | 0,11    | ●     |
| 16 | 1/2"   | Svær           | 400 | 53,0 | 31,5 | 30  | 27  | HF25   | 0,18    | ●     |
| 18 | 3/8"   | Let            | 315 | 47,0 | 26,5 | 32  | 27  | HF20   | 0,14    | ●     |
| 18 | 1/2"   | Let            | 315 | 50,5 | 30,5 | 32  | 27  | HF20   | 0,15    | ●     |
| 20 | 3/8"   | Svær           | 400 | 49,0 | 27,5 | 32  | 36  | HF25   | 0,25    | ○     |
| 20 | 1/2"   | Svær           | 400 | 57,0 | 57,0 | 36  | 32  | HF25   | 0,25    | ●     |
| 20 | 3/4"   | Svær           | 400 | 60,0 | 60,0 | 36  | 32  | HF25   | 0,30    | ●     |
| 22 | 3/4"   | Let            | 160 | 56,0 | 35,5 | 36  | 32  | HF20   | 0,27    | ●     |
| 25 | 1"     | Svær           | 315 | 66,5 | 37,5 | 46  | 41  | HF25   | 0,47    | ●     |
| 28 | 1"     | Let            | 160 | 60,5 | 38,0 | 41  | 41  | HF20   | 0,31    | ●     |
| 30 | 1.1/4" | Svær           | 315 | 72,5 | 42,0 | 50  | 55  | HF25   | 0,72    | ●     |
| 35 | 1.1/4" | Let            | 160 | 68,5 | 41,0 | 50  | 55  | HF20   | 0,59    | ○     |
| 38 | 1.1/2" | Svær           | 315 | 79,5 | 43,5 | 60  | 60  | HF25   | 0,89    | ○     |
| 42 | 1.1/2" | Let            | 160 | 69,5 | 42,5 | 60  | 60  | HF20   | 0,76    | ○     |

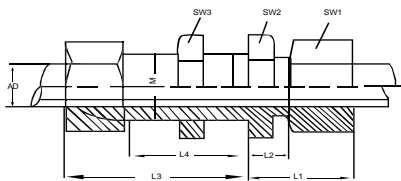

## Bulk head union

Bulk head union

DIN 2353 / DIN EN ISO 8434-1


EN 10204 3.1



| AD | Udførelse Code | Bar | L1 | L2   | L3 | L4   | SW1  | SW2  | SW3  | Art.no | Kg / pc | 316Ti |
|----|----------------|-----|----|------|----|------|------|------|------|--------|---------|-------|
| 6  | Let            | 315 | 22 | 7    | 42 | 27   | 14,0 | 17,0 | 17,0 | HB10   | 0,06    | ●     |
| 8  | Let            | 315 | 23 | 8    | 42 | 27   | 17,0 | 19,0 | 19,0 | HB10   | 0,08    | ●     |
| 10 | Let            | 315 | 25 | 10   | 43 | 28   | 19,0 | 22,0 | 22,0 | HB10   | 0,11    | ●     |
| 12 | Let            | 315 | 25 | 10   | 44 | 29   | 22,0 | 24,0 | 24,0 | HB10   | 0,14    | ●     |
| 14 | Svær           | 630 | 35 | 17   | 50 | 32   | 27,0 | 30,0 | 30,0 | HB15   | 0,30    | ●     |
| 15 | Let            | 315 | 27 | 12   | 46 | 31   | 27,0 | 30,0 | 27,0 | HB10   | 0,23    | ●     |
| 16 | Svær           | 400 | 35 | 16,5 | 50 | 31,5 | 30,0 | 32,0 | 32,0 | HB15   | 0,35    | ●     |
| 18 | Let            | 315 | 30 | 13,5 | 49 | 32,5 | 32,0 | 36,0 | 32,0 | HB10   | 0,35    | ○     |
| 20 | Svær           | 400 | 39 | 17,5 | 55 | 33,5 | 36,0 | 41,0 | 41,0 | HB15   | 0,58    | ○     |
| 22 | Let            | 160 | 33 | 16,5 | 51 | 34,5 | 36,0 | 41,0 | 36,0 | HB10   | 0,44    | ○     |
| 25 | Svær           | 400 | 44 | 20   | 59 | 35   | 46,0 | 46,0 | 46,0 | HB15   | 0,95    | ○     |
| 28 | Let            | 160 | 35 | 18,5 | 52 | 35,5 | 41,0 | 46,0 | 41,0 | HB10   | 0,55    | ○     |
| 30 | Svær           | 400 | 48 | 21,5 | 64 | 37,5 | 50,0 | 50,0 | 50,0 | HB15   | 1,12    | ○     |
| 35 | Let            | 160 | 40 | 18,5 | 58 | 36,5 | 50,0 | 55,0 | 50,0 | HB10   | 0,87    | ○     |
| 38 | Svær           | 315 | 53 | 22   | 68 | 37   | 60,0 | 65,0 | 65,0 | HB15   | 1,69    | ○     |
| 42 | Let            | 160 | 42 | 19   | 59 | 36   | 60,0 | 65,0 | 60,0 | HB10   | 1,28    | ○     |

● = lager  
○ = ab fabrik

● = stock  
○ = ex works




## Union m / prop


### Straight cap union

DIN 2353 / DIN EN ISO 8434-1

EN 10204 3.1



| AD | Udførelse Code | Bar | L    | SW1 | SW2 | Art.no | Kg / pc | 316Ti |
|----|----------------|-----|------|-----|-----|--------|---------|-------|
| 6  | Let            | 315 | 17,0 | 12  | 14  | HK40   | 0,10    | ○     |
| 8  | Let            | 315 | 17,0 | 14  | 17  | HK40   | 0,10    | ○     |
| 10 | Let            | 315 | 17,0 | 17  | 19  | HK40   | 0,10    | ○     |
| 12 | Let            | 315 | 17,0 | 19  | 22  | HK40   | 0,10    | ○     |
| 14 | Svær           | 630 | 24,0 | 24  | 27  | HK45   | 0,20    | ○     |
| 15 | Let            | 315 | 18,0 | 24  | 27  | HK40   | 0,17    | ○     |
| 16 | Svær           | 400 | 24,0 | 27  | 30  | HK45   | 0,16    | ○     |
| 18 | Let            | 315 | 19,0 | 27  | 32  | HK40   | 0,19    | ○     |
| 20 | Svær           | 400 | 28,0 | 32  | 36  | HK45   | 0,39    | ○     |
| 22 | Let            | 160 | 21,0 | 32  | 36  | HK40   | 0,29    | ○     |
| 25 | Svær           | 400 | 32,0 | 41  | 46  | HK45   | 0,49    | ○     |
| 28 | Let            | 160 | 22,0 | 41  | 41  | HK40   | 0,27    | ○     |
| 30 | Svær           | 400 | 34,0 | 46  | 50  | HK45   | 0,67    | ○     |
| 35 | Let            | 160 | 25,0 | 46  | 50  | HK40   | 0,47    | ○     |
| 38 | Svær           | 315 | 39,0 | 55  | 60  | HK45   | 0,94    | ○     |
| 42 | Let            | 160 | 27,0 | 55  | 60  | HK40   | 0,61    | ○     |



## Skærerering

### Cutting ring

DIN 2353 / DIN EN ISO 8434-1


EN 10204 3.1



| AD | Udførelse Code | S1   | Art.no | Kg / pc | 316Ti |
|----|----------------|------|--------|---------|-------|
| 6  | Let            | 9,0  | HC40   | 0,002   | ●     |
| 8  | Let            | 9,0  | HC40   | 0,002   | ●     |
| 10 | Let            | 9,5  | HC40   | 0,003   | ●     |
| 12 | Let            | 9,5  | HC40   | 0,003   | ●     |
| 14 | Svær           | 10,0 | HC45   | 0,004   | ●     |
| 15 | Let            | 10,0 | HC40   | 0,004   | ●     |
| 16 | Svær           | 10,0 | HC45   | 0,004   | ●     |
| 18 | Let            | 10,0 | HC40   | 0,005   | ●     |
| 20 | Svær           | 11,5 | HC45   | 0,009   | ●     |
| 22 | Let            | 11,0 | HC40   | 0,006   | ●     |
| 25 | Svær           | 12,5 | HC45   | 0,011   | ●     |
| 28 | Let            | 11,0 | HC40   | 0,008   | ●     |
| 30 | Svær           | 12,5 | HC45   | 0,015   | ●     |
| 35 | Let            | 13,5 | HC40   | 0,017   | ○     |
| 38 | Svær           | 13,5 | HC45   | 0,019   | ○     |
| 42 | Let            | 13,5 | HC40   | 0,021   | ○     |

● = lager  
○ = ab fabrik

● = stock  
○ = ex works

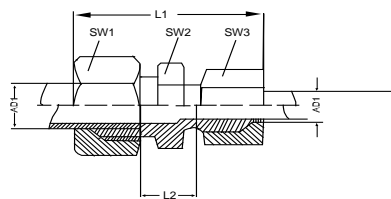

## Lige red. Union

Straight reducing union

DIN 2353 / DIN EN ISO 8434-1


EN 10204 3.1



| AD1 | AD2 | Udførelse<br>Code | Bar<br>Code | L1   | L2   | SW1 | SW2 | SW3 | Art.no | Kg / pc | 316Ti |
|-----|-----|-------------------|-------------|------|------|-----|-----|-----|--------|---------|-------|
| 8   | 6   | Let               | 315         | 45,5 | 11,0 | 17  | 14  | 14  | HR10   | 0,05    | ●     |
| 10  | 6   | Let               | 315         | 47,0 | 12,0 | 19  | 17  | 14  | HR10   | 0,06    | ●     |
| 10  | 8   | Let               | 315         | 47,0 | 12,0 | 19  | 17  | 17  | HR10   | 0,06    | ●     |
| 12  | 6   | Let               | 315         | 48,0 | 13,0 | 22  | 19  | 14  | HR10   | 0,06    | ●     |
| 12  | 8   | Let               | 315         | 48,0 | 13,0 | 22  | 19  | 17  | HR10   | 0,07    | ●     |
| 12  | 10  | Let               | 315         | 49,5 | 14,0 | 22  | 19  | 19  | HR10   | 0,08    | ●     |
| 14  | 10  | Svær              | 630         | 60,0 | 20,5 | 27  | 24  | 22  | HR15   | 0,13    | ●     |
| 14  | 12  | Svær              | 630         | 60,0 | 20,5 | 27  | 24  | 24  | HR15   | 0,17    | ●     |
| 15  | 6   | Let               | 315         | 50,5 | 14,0 | 27  | 24  | 14  | HR10   | 0,10    | ●     |
| 15  | 8   | Let               | 315         | 50,5 | 14,0 | 27  | 24  | 17  | HR10   | 0,11    | ●     |
| 15  | 10  | Let               | 315         | 52,0 | 15,0 | 27  | 24  | 19  | HR10   | 0,11    | ●     |
| 15  | 12  | Let               | 315         | 52,0 | 15,0 | 27  | 24  | 22  | HR10   | 0,12    | ●     |
| 16  | 10  | Svær              | 400         | 60,5 | 20,0 | 30  | 27  | 22  | HR15   | 0,19    | ●     |
| 16  | 12  | Svær              | 400         | 60,5 | 20,0 | 30  | 27  | 24  | HR15   | 0,19    | ●     |
| 16  | 14  | Svær              | 400         | 63,5 | 21,5 | 30  | 27  | 27  | HR15   | 0,22    | ●     |
| 18  | 8   | Let               | 315         | 52,0 | 14,5 | 32  | 27  | 27  | HR10   | 0,12    | ●     |
| 18  | 10  | Let               | 315         | 53,5 | 15,5 | 32  | 27  | 19  | HR10   | 0,15    | ●     |
| 18  | 12  | Let               | 315         | 53,5 | 15,5 | 32  | 27  | 22  | HR10   | 0,16    | ●     |
| 18  | 15  | Let               | 315         | 56,5 | 16,5 | 32  | 27  | 27  | HR10   | 0,18    | ●     |
| 20  | 10  | Svær              | 400         | 65,5 | 22,0 | 36  | 32  | 22  | HR15   | 0,27    | ●     |
| 20  | 12  | Svær              | 400         | 65,5 | 22,0 | 36  | 32  | 24  | HR15   | 0,28    | ●     |
| 20  | 14  | Svær              | 400         | 68,5 | 23,0 | 36  | 32  | 27  | HR15   | 0,30    | ●     |
| 20  | 16  | Svær              | 400         | 69,5 | 23,0 | 36  | 32  | 30  | HR15   | 0,32    | ●     |
| 22  | 12  | Let               | 160         | 57,0 | 17,5 | 36  | 32  | 22  | HR10   | 0,20    | ●     |
| 22  | 15  | Let               | 160         | 59,0 | 18,5 | 36  | 32  | 27  | HR10   | 0,22    | ●     |
| 22  | 18  | Let               | 160         | 60,0 | 18,0 | 36  | 32  | 32  | HR10   | 0,25    | ○     |
| 25  | 16  | Svær              | 400         | 74,5 | 25,5 | 46  | 41  | 30  | HR15   | 0,55    | ○     |
| 25  | 20  | Svær              | 400         | 79,0 | 25,5 | 46  | 41  | 36  | HR15   | 0,56    | ○     |
| 28  | 10  | Let               | 160         | 60,0 | 20,5 | 41  | 41  | 19  | HR10   | 0,25    | ○     |
| 28  | 15  | Let               | 160         | 62,5 | 19,0 | 41  | 41  | 27  | HR10   | 0,30    | ○     |
| 28  | 18  | Let               | 160         | 61,0 | 19,0 | 41  | 41  | 32  | HR10   | 0,31    | ○     |
| 28  | 22  | Let               | 160         | 64,0 | 21,0 | 41  | 41  | 36  | HR10   | 0,31    | ●     |
| 30  | 20  | Svær              | 400         | 81,5 | 26,0 | 50  | 46  | 36  | HR15   | 0,78    | ○     |
| 30  | 25  | Svær              | 400         | 86,0 | 26,5 | 50  | 46  | 46  | HR15   | 0,80    | ○     |
| 35  | 28  | Let               | 160         | 70,5 | 21,0 | 50  | 46  | 41  | HR10   | 0,46    | ○     |
| 38  | 30  | Svær              | 315         | 95,5 | 29,5 | 60  | 55  | 50  | HR15   | 0,87    | ○     |

● = lager  
○ = ab fabrik

● = stock  
○ = ex works



## Møtrik


Nut

DIN 2353 / DIN EN ISO 8434-1

EN 10204 3.1



| AD | Udførelse Code | Bar | SW | H    | M       | Art.no | Kg / pc | 316Ti |
|----|----------------|-----|----|------|---------|--------|---------|-------|
| 6  | Let            | 315 | 14 | 14,5 | M12x1,5 | HN40   | 0,010   | ●     |
| 8  | Let            | 315 | 17 | 14,5 | M14x1.5 | HN40   | 0,015   | ●     |
| 10 | Let            | 315 | 19 | 15,5 | M16x1.5 | HN40   | 0,019   | ●     |
| 12 | Let            | 315 | 22 | 15,5 | M18x1.5 | HN40   | 0,024   | ●     |
| 15 | Let            | 315 | 27 | 17   | M22x1.5 | HN40   | 0,041   | ●     |
| 22 | Let            | 160 | 36 | 20   | M30x2   | HN40   | 0,081   | ●     |
| 28 | Let            | 160 | 41 | 21   | M36x2   | HN40   | 0,091   | ●     |
| 14 | Svær           | 630 | 27 | 20,5 | M22x1,5 | HN45   | 0,050   | ●     |
| 16 | Svær           | 400 | 30 | 20,5 | M24x1,5 | HN45   | 0,064   | ●     |
| 20 | Svær           | 400 | 36 | 24   | M30x2   | HN45   | 0,102   | ●     |
| 25 | Svær           | 400 | 46 | 27   | M36x2   | HN45   | 0,210   | ●     |
| 18 | Let            | 315 | 32 | 18   | M26x1,5 | HN40   | 0,062   | ○     |
| 35 | Let            | 160 | 50 | 24   | M45x2   | HN40   | 0,142   | ○     |
| 42 | Let            | 160 | 60 | 24   | M52x2   | HN40   | 0,220   | ○     |



## Nippel adapter

Male connector

DIN 2353 / DIN EN ISO 8434-1


EN 10204 3.1



| AD | G    | Udførelse Code | Bar | SW1 | SW2 | S1   | S2   | Art.no | Kg / pc | 316Ti |
|----|------|----------------|-----|-----|-----|------|------|--------|---------|-------|
| 6  | 1/8" | Let            | 315 | 14  | 14  | 23   | 8,5  | HM20   | 0,03    | ●     |
| 6  | 1/4" | Let            | 315 | 14  | 17  | 27   | 9,0  | HM20   | 0,04    | ●     |
| 6  | 3/8" | Let            | 315 | 14  | 22  | 27   | 11,5 | HM20   | 0,06    | ●     |
| 6  | 1/2" | Let            | 315 | 14  | 27  | 29   | 12,0 | HM20   | 0,10    | ●     |
| 8  | 1/8" | Let            | 315 | 17  | 14  | 26   | 9,5  | HM20   | 0,03    | ●     |
| 8  | 1/4" | Let            | 315 | 17  | 19  | 25   | 10,0 | HM20   | 0,04    | ●     |
| 8  | 1/4" | Svær           | 630 | 19  | 19  | 30   | 15,0 | HM25   | 0,06    | ○     |
| 8  | 3/8" | Let            | 315 | 17  | 22  | 28,5 | 11,5 | HM20   | 0,06    | ●     |
| 8  | 3/8" | Svær           | 630 | 19  | 22  |      | 15,5 | HM25   | 0,08    | ○     |
| 8  | 1/2" | Let            | 315 | 17  | 27  | 28,5 | 13,0 | HM20   | 0,10    | ●     |
| 10 | 1/8" | Let            | 315 | 19  | 17  | 27,5 | 11,0 | HM20   | 0,05    | ●     |
| 10 | 1/4" | Let            | 315 | 19  | 19  | 26   | 11,0 | HM20   | 0,05    | ●     |
| 10 | 3/8" | Svær           | 630 | 22  | 22  | 31   | 15,0 | HM25   | 0,06    | ○     |
| 10 | 3/8" | Let            | 315 | 19  | 22  | 30,5 | 12,5 | HM20   | 0,09    | ●     |
| 10 | 1/2" | Let            | 315 | 19  | 27  | 32,5 | 13,0 | HM20   | 0,10    | ●     |
| 12 | 1/8" | Let            | 315 | 22  | 19  | 29   | 11,0 | HM20   | 0,05    | ●     |
| 12 | 1/4" | Let            | 315 | 22  | 19  | 30   | 12,0 | HM20   | 0,06    | ●     |
| 12 | 3/8" | Let            | 315 | 22  | 22  | 27   | 12,5 | HM20   | 0,07    | ●     |
| 12 | 3/8" | Svær           | 630 | 24  | 22  | 33   | 17,0 | HM25   | 0,10    | ○     |
| 12 | 1/2" | Let            | 315 | 22  | 27  | 31   | 13,0 | HM20   | 0,10    | ●     |
| 14 | 3/8" | Svær           | 630 | 27  | 24  |      | 17,0 | HM25   | 0,13    | ●     |
| 14 | 1/2" | Svær           | 630 | 27  | 27  | 37   | 19,0 | HM25   | 0,15    | ●     |
| 14 | 3/4" | Svær           | 630 | 27  | 32  |      | 19,0 | HM25   | 0,20    | ●     |

● = lager  
○ = ab fabrik

● = stock  
○ = ex works



## Nippel adapter

Male connector

DIN 2353 / DIN EN ISO 8434-1

EN 10204 3.1



| AD | G      | Udførelse<br>Code | Bar | SW1 | SW2 | S1   | S2   | Art.no | Kg / pc | 316Ti |
|----|--------|-------------------|-----|-----|-----|------|------|--------|---------|-------|
| 15 | 1/4"   | Let               | 315 | 27  | 24  | 32   | 13,0 | HM20   | 0,08    | ●     |
| 15 | 3/8"   | Let               | 315 | 27  | 24  | 31   | 13,5 | HM20   | 0,10    | ●     |
| 15 | 1/2"   | Let               | 315 | 27  | 27  | 29   | 14,0 | HM20   | 0,11    | ●     |
| 15 | 3/4"   | Let               | 315 | 27  | 32  | 32,5 | 15,0 | HM20   | 0,17    | ●     |
| 16 | 3/8"   | Svær              | 400 | 30  | 27  |      | 18,0 | HM25   | 0,16    | ●     |
| 16 | 1/2"   | Svær              | 400 | 30  | 27  | 18,5 | 14,0 | HM25   | 0,16    | ●     |
| 16 | 3/4"   | Svær              | 400 | 30  | 32  | 39   | 20,5 | HM25   | 0,21    | ●     |
| 18 | 3/8"   | Let               | 315 | 32  | 27  | 33   | 12,5 | HM20   | 0,14    | ●     |
| 18 | 1/2"   | Let               | 315 | 32  | 27  | 31   | 14,5 | HM20   | 0,14    | ●     |
| 18 | 3/4"   | Let               | 315 | 32  | 32  | 34   | 14,5 | HM20   | 0,19    | ●     |
| 20 | 1/2"   | Svær              | 400 | 36  | 32  |      | 20,5 | HM25   | 0,25    | ●     |
| 20 | 3/4"   | Svær              | 400 | 36  | 32  | 42   | 20,5 | HM25   | 0,28    | ●     |
| 20 | 1"     | Svær              | 400 | 36  | 41  |      | 22,5 | HM25   | 0,39    | ●     |
| 20 | 1.1/4" | Svær              | 400 | 36  | 50  |      | 22,5 | HM25   | 0,40    | ●     |
| 20 | 1.1/2" | Svær              | 400 | 36  | 55  | 47   | 25,5 | HM25   | 0,55    | ○     |
| 22 | 1/2"   | Let               | 160 | 36  | 32  | 37   | 16,5 | HM20   | 0,20    | ●     |
| 22 | 3/4"   | Let               | 160 | 36  | 32  | 33   | 16,5 | HM20   | 0,20    | ●     |
| 22 | 1"     | Let               | 160 | 36  | 41  | 38   | 17,5 | HM20   | 0,29    | ●     |
| 25 | 1/2"   | Svær              | 400 | 46  | 41  |      | 23,0 | HM25   | 0,40    | ●     |
| 25 | 3/4"   | Svær              | 400 | 46  | 41  |      | 23,0 | HM25   | 0,46    | ●     |
| 25 | 1"     | Svær              | 400 | 46  | 41  | 23   | 18,0 | HM25   | 0,49    | ●     |
| 25 | 1.1/4" | Svær              | 400 | 46  | 50  |      | 23,0 | HM25   | 0,67    | ●     |
| 28 | 1/2"   | Let               | 160 | 41  | 41  |      | 17,5 | HM20   | 0,20    | ●     |
| 28 | 3/4"   | Let               | 160 | 41  | 41  | 38   | 17,5 | HM20   | 0,30    | ●     |
| 28 | 1"     | Let               | 160 | 41  | 41  | 34   | 17,5 | HM20   | 0,27    | ●     |
| 28 | 1.1/4" | Let               | 160 | 41  | 50  |      | 18,5 | HM20   | 0,35    | ●     |
| 30 | 1"     | Svær              | 400 | 50  | 46  |      | 23,5 | HM20   | 0,58    | ●     |
| 30 | 1.1/4" | Svær              | 400 | 50  | 50  | 50   | 23,5 | HM25   | 0,67    | ●     |
| 30 | 1.1/2" | Svær              | 400 | 50  | 55  |      | 23,5 | HM25   | 0,67    | ●     |
| 35 | 1.1/4" | Let               | 160 | 50  | 50  | 39   | 17,5 | HM20   | 0,47    | ○     |
| 38 | 1.1/4" | Svær              | 315 | 60  | 55  |      | 23,0 | HM25   | 0,92    | ○     |
| 38 | 1.1/2" | Svær              | 315 | 60  | 55  | 57   | 26,0 | HM25   | 0,94    | ○     |
| 42 | 1.1/2" | Let               | 160 | 60  | 55  | 47   | 19,0 | HM20   | 0,61    | ○     |

## Smøre Pasta

Can lubricant

|  | Kg / pc |   |
|--|---------|---|
|  | 0,500   | ● |

- = lager
- = ab fabrik

- = stock
- = ex works